



NEW ITEMS 2020

Valid from 31/08/2020
to 14/12/2020

Prices do not include V.A.T.



C24S/7-M

024002037

Mobile roller cab with 7 drawers

- 7 drawers (588x367 mm) with ball bearing slides.
- Drawer bases protected by foamed rubber mats.
- Four castors 125 mm in Ø: 2 fixed and 2 steering (one with brake).
- Front centralized safety lock.
- Integrated side bottle holder.
- Paper roll holder item 2400S-R/PC can also be included.

n°	h	max
5	70 mm	25 kg
1	140 mm	30 kg
1	210 mm	30 kg



GREY MATT FINISHING



Pull-out drawer with quick release system made of fibreglass-reinforced nylon, opening throughout length of drawer



Sturdy ABS worktop

58 kg

C50S

050000301

050000302

050000303

Service tool trolley with 3 drawers

- Thermoplastic worktop
- 3 drawers (588x367 mm) with ball bearing slides, 70 mm high.
- Drawer bases protected by foamed rubber mat
- Front centralized safety lock.
- Large lower shelf protected by an anti-oil and anti-rubber mat.
- Four castors, Ø 125 mm: 2 fixed and 2 steering (one with brake).
- Capacity of each drawer: 15 kg, uniformly distributed.
- Paper roll holder item 2400S-R/PC can be applied on request.
- **Folding shelf item 5000MS** can be applied on request.



A MUST-HAVE FOR YOUR WORKSHOP!




- Convenient side screwdriver holder included
- Two side built-in spray can holders

5000MS

050000901

Folding shelf for tool trolley item C50S

- For use as additional worktop.
- Worktop dimensions: 390x440 mm, protected by an anti-oil and anti-petrol rubber mat.
- Load capacity: 20 kg.



3,4 kg



n°	h	max
3	70 mm	15 kg

38 kg



5904VG/3M

059040220

SOFT
MODULE
SYSTEM

Assortment of 130 tools
in soft foam trays

Assortment recommended for use with
item C23ST - C24S - C24SA - C24SA-XL -
C24SL - C24SL/CAB - C37 - C39 - C39T -
C39SM - C39MD - RSC55 - C59 - C28



Quantity/Description

16	combination wrenches 6÷21 mm	42	M15
5	combination wrenches 22 - 24 - 27 - 30 - 32 mm	42	M16
1	Slip joint pliers boxed joints 250 mm	1048	M153
1	self - locking pliers 240 mm	1052	M153
8	offset hexagon key wrenches 2-2,5-3-4-5-6-7-8 mm	96T	M50
5	drivers for Torx® head screws, with handles T10-T15-T20-T25-T30	97TTX	M55
1	adjustable wrench 250 mm	111	M292
1	electrician's scissors, straight blades	1128BMX	M292
1	measuring tape 5 m	1692/5	M292
1	snap - off blade utility knife 170 mm	1771	M292
5	screwdrivers for cross head Phillips® screws 3x75 - 3,5x100 - 4x125 - 5,5x150 - 6,5x150 mm	1260	M208
3	screwdrivers for cross head Phillips® screws PH0x60 - PH1x80 - PH2x100 mm	1262	M208
1	screwdrivers for slotted head screws, extra-short series 4x30 mm	1260N	M208
1	screwdrivers for cross head Phillips® screws, extra - short series PH1x30 mm	1262N	M208
5	bits for slotted head screws, coloured 0,5x3 - 0,6x4,5 - 0,8x5,5 - 1x5,5 - 1,2x6,5 mm	860LP	M85
8	hexagon bits for power drivers, coloured 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	860PE	M85
5	bits for cross head Phillips® screws, coloured PH0 - PH1 - PH2 - PH3 - PH4	860PH	M85
4	bits for cross head Pozidriv® - Supadriv® screws, coloured PZ1 - PZ2 - PZ3 - PZ4	860PZ	M85

Beta N. TR

Quantity/Description

11	bits for Torx® head screws, coloured T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40	860TX	M85
8	bits for Tamper Resistant Torx® head screws, coloured T9-T10-T15-T20-T25-T27-T30-T40	860RTX	M85
1	magnetic bit holder with handle 230 mm	851SR	M85
1	reversible bit ratchet 100 mm	860/55	M85
1	magnetic bit holder extension bar 80 mm	882P	M85
1	adaptors for drivers 1/4 - 1/4	892	M85
2	flat chisels, ribbed type 100 - 200 mm	35	M234
1	engineer's hammer 300 g	1370	M234
1	soft face hammer Ø 35 mm	1390	M234
1	1/2" wobble extension bar 125 mm	920AN	M83
1	1/2" wobble extension bar 250 mm	920AN	M83
1	1/2" drive universal joint	920/25	M83
1	1/2" drive sliding T-handle	920/42	M83
1	1/2" drive reversible ratchet	920/55	M83
19	1/2" square drive hexagon sockets 10÷24-26-27-30-32 mm	920A	M83
1	diagonal cutting nippers 160 mm	1082GBM	M134
1	combination pliers 180 mm	1150GBM	M134
1	extra long needle knurled nose pliers 160 mm	1166GBM	M134
1	circclip pliers straight, internal 180 mm	1032	M145
1	circclip pliers bent, internal 170 mm	1034	M145
1	circclip pliers straight, external 175 mm	1036	M145
1	circclip pliers bent, external 175 mm	1038	M145

Beta N. TR

860TX	M85
860RTX	M85
851SR	M85
860/55	M85
882P	M85
892	M85
35	M234
1370	M234
1390	M234
920AN	M83
920AN	M83
920/25	M83
920/42	M83
920/55	M83
920A	M83
1082GBM	M134
1150GBM	M134
1166GBM	M134
1032	M145
1034	M145
1036	M145
1038	M145

16,2 kg

M133

024500133



1082G 160 mm
1150G 180 mm
1166G 160 mm

INDUSTRIAL
FINISHING

650 g

M134

024500134



1082GBM 160 mm
1150GBM 180 mm
1166GBM 160 mm

INDUSTRIAL
FINISHING

750 g

M292

024500292



111 250 mm
1128BMX 5 m
1692/5 170 mm

500 g

C45/D

Workshop equipment combination C45

Combination comprising:

- 1 fixed module with 7 drawers (C45M7)
- 1 mobile roller cab with 7 drawers (C45C7)
- 1 fixed service module (C45MS)
- 1 fixed module with 5 drawers (C45M5)
- 1 fixed module with 2 doors (C45MA)
- 5 perforated tool panels (C45PF)
- 5 wall-mounted cabinets (C45PM)
- 7 wall brackets, wide type (C45SL)
- 2 wall brackets, narrow type (C45SS)
- 2 single-door tool cabinets (C45AS1)

C45/DX

045000075

Workshop equipment combination C45/DX

- 1 worktop made of stainless steel coated MDF (C45PX/3-2,0MT)
- 1 worktop made of stainless steel coated MDF (C45PX/2-1,3MT)
- 1 self-supporting complete corner with stainless steel coated MDF worktop (C45CORNER/X)



572 kg

C45/EX



045000078

Workshop equipment combination C45/EX



Combination comprising:

- 2 perforated tool panels (C45PF)
- 2 wall-mounted cabinets (C45PM)
- 2 wall brackets, wide type (C45SL)
- 1 wall bracket, narrow type (C45SS)
- 1 single-door tool cabinet (C45AS1)

- Fixed module with 7 drawers and worktop made of stainless steel coated MDF (C45M7A/X):
 - 1 drawer 1248x406 mm
 - 6 drawers 782x406 mm
 - 5 drawers 85 mm high, 1 drawer 155 mm high
 - 1 object compartment with intermediate shelf and door



174 kg

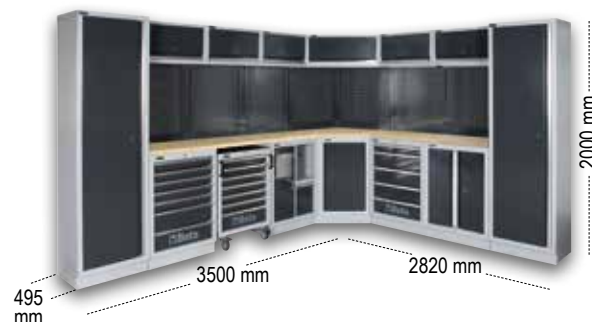

C45/DW

045000076

Workshop equipment combination C45/DW

- 1 multi-ply wood worktop (C45PW/3-2,0MT)
- 1 multi-ply wood worktop (C45PW/2-1,3MT)
- 1 self-supporting complete corner with wood worktop (C45CORNER/W)

568 kg


C45/EW

045000079


Workshop equipment combination C45/EW

Combination comprising:

- 2 perforated tool panels (C45PF)
- 2 wall-mounted cabinets (C45PM)
- 2 wall brackets, wide type (C45SL)
- 1 wall bracket, narrow type (C45SS)
- 1 single-door tool cabinet (C45AS1)



- Fixed module with 7 drawers and **multi-ply wood worktop** (C45M7A/W):
 - 1 drawer 1248x406 mm
 - 6 drawers 782x406 mm
 - 5 drawers 85 mm high, 1 drawer 155 mm high
 - 1 object compartment with intermediate shelf and door



173 kg

C56PL O

056000021

Folding workbench, *Light version*

- Lightweight, compact, easy to carry.
- Handle with rubber cover, for easy transportation.
- Feet with nonslip cover.
- Static load capacity: 200 kg

- Worktop (800x500mm) made of galvanized sheet iron, for use on one side only, protected by an anti-oil and anti-petrol rubber cover.

**EVEN LIGHTER!
ONLY 18,5 kg**



18,5 kg

4900-COVER C49

049000930

Nylon cover for multi-purpose tool trolley item C49

- Material: nylon
- Dimensions: 562 x 1002 x 592 mm






900/55Z

009000882

1/4" drive reversible ratchet,
chromium-plated


• 72 teeth mechanism

15 meshing
teeth allow
excellent
effort
distribution



5° TAKE-UP
ANGLE

72 TEETH
MORE COMPACT
RATCHET HEAD



L mm	Ø mm	A mm	■
126	25	23	1/4

90 g

900/C12MZ

009000983

Set of 12 hexagon sockets,
20 bits and 7 accessories in foam tray,
in metal case

	861LP	●	0,5-0,8-1-1,2 mm
	861PE	○	3-4-5-6-8 mm
	861PH	⊕	PH0-PH1-PH2-PH3
	861TX	⊗	T8-T10-T15-T20-T25-T30-T40
	895/1	○	1/4" - 1/2"
	900	○	4-5-5,5-6-7-8-9-10-11-12-13-14 mm
	900/20		50 mm
	900/21		150 mm
	900/25		
	900/42		115 mm
	900BG/30		128 mm
	900/55Z	⊗	



350x150x50 mm

1,2 kg

910FTX/XL-C10

009100976

Set of 10 hand sockets
for Torx® head screws, long series,
in plastic case

⊗ E6-E7-E8-E10-E11
E12-E14-E16-E18-E20



SOCKETS
200 mm LONG



255x195x62 mm

1 kg

1169G/D3

011690073

Set of 1 combination pliers,
1 long needle nose pliers
and 1 diagonal cutting nippers,
slip-proof double layer PVC,
industrial finishing



The **DECENTRALIZED PIN**
allows the fulcrum to be
closer to the cutting point,
thereby resulting in an
improved lever effect.

NEW FINISHING



1082G 160 mm

1166G 160 mm

1150G 180 mm

700 g

1169GBM/D3

011690273

Set of 1 combination pliers,
1 long needle nose pliers
and 1 diagonal cutting nippers,
bi-material handles,
industrial finishing



The **DECENTRALIZED PIN**
allows the fulcrum to be
closer to the cutting point,
thereby resulting in an
improved lever effect.

NEW FINISHING



1082GBM 160 mm

1166GBM 160 mm

1150GBM 180 mm

760 g



LED inspection torch, made of sturdy anodized aluminium

- adjustable focus

NEW DESIGN



1833 XS/1

018330000



- battery life: 5.0 h
- L 92 mm

33 g

1833 XS/2

018330001



- battery life: 10.0 h
- L 133 mm

53 g

High-brightness LED torch, made of sturdy anodized aluminium

- adjustable focus
- 2 brightness settings

NEW DESIGN



1833 S

018330002



- battery life: 10.0 h
- L 150 mm

62 g

1833 L

018330004




- battery life: 8.5 h
- L 196 mm

300 g

1833 M

018330003



- battery life: 7.5 h
- L 162 mm

165 g

1833 XL

018330005



- battery life: 22.0 h
- L 300 mm

420 g


1833 L/USB

018330054

High-brightness LED torch, made of sturdy anodized aluminium, up to 1,200 lumens

- adjustable focus
- 3 brightness settings
- battery life: 3.0 h
- flat battery indicator (<15%)
- **USB-C charging**
- charger not included

NEW DESIGN



RECHARGEABLE


380 g

1837F

018370050

Magnetic, articulated lamp with high-brightness LEDs, made of sturdy anodized aluminium, up to 500 lumens


- adjustable focus
- 2 brightness settings
- batteries: 3xAA (not included)
- battery life: 14.5 h
- charge indicator

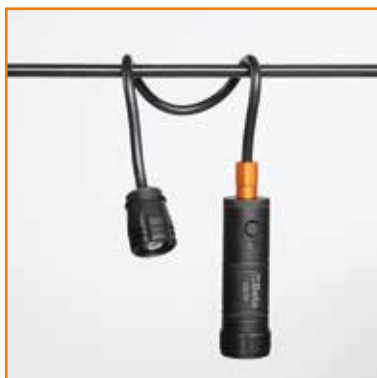

NEW DESIGN



L 460 mm

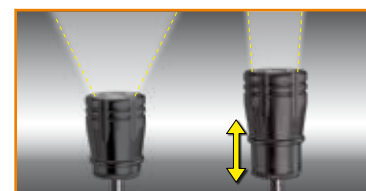

300 g

1837F/USB

018370060

Rechargeable, magnetic, articulated lamp with high-brightness LEDs, made of sturdy anodized aluminium, up to 600 lumens

- adjustable focus
- 2 brightness settings
- battery life: 10.0 h
- USB-C charging



RECHARGEABLE



NEW DESIGN



L 460 mm

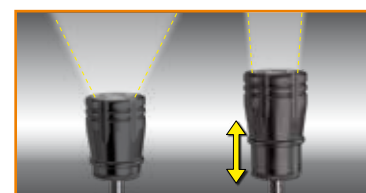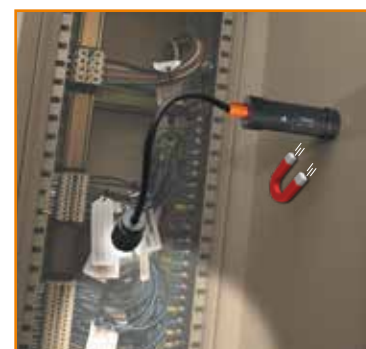

325 g



1838S


018380122

Rechargeable, articulated LED inspection lamp

- can be rotated 180°
- nonslip rubber body
- double swinging hook
- magnets on base and back for increased adjustability
- complete with charger (100-240V / 50-60Hz)
- charging time: 4h
- battery life: 2-7.5 h

DUAL LIGHT EMISSION,

- FRONT: 150/300/700 LUMENS
- SPOT (HEAD): 200 LUMENS



700 LUMEN



4h

2-7.5h
Spot 5h

IP65



260x52x38 mm



RECHARGEABLE



380 g

1838SLIM

018380221

Rechargeable, articulated slim 3-LED inspection lamp

- magnetic base
- charging time: 2.5h
- battery life: 2-4h/ spot 3h

TRIPLE LIGHT EMISSION

- FRONT: 100/200 LUMENS
- BACK: 180 LUMENS
- SPOT (HEAD): 80 LUMENS



80 LUMEN

200 LUMEN



2.5h

2-4h
Spot 3h

IP65



307x29x17 mm



RECHARGEABLE

80 g

1693

016930020

IP54 CE

Laser distance meter, 20 m


MEASUREMENTS:

- single distance measurement
- continuous measurement or minimal measurement
- Auto off feature
- Battery life: up to 4,000 measurements

TECHNICAL DATA

Measurement range	0.05 ÷ 20m (0.2in ÷ 66f)
Scale selection	m, in, ft
Measurement accuracy	±1,5 mm (± 0.06 in)
Laser class	2
Battery	AAA 2 x 1.5V

20 m



80 g

1693M

016930080

IP54 CE

Laser distance meter, multipurpose, 80 m

MEASUREMENTS:

- single distance measurement
- continuous measurement or minimal measurement

FUNCTIONS:

- addition/subtraction
- area measurement
- volume measurement
- indirect measurement (Pythagorean measurement)
- tilt measurement
- Auto off feature
- Soft cloth case (included)
- Battery life: up to 4,000 measurements

TECHNICAL DATA

Measurement range	0.05 ÷ 80 m (0.2 in ÷ 229f)
Scale selection	m, in, ft
Measurement accuracy	±1,5 mm (± 0.06 in)
Laser class	2
Max. storage	99 units
Battery	AAA 2 x 1.5V

80 m



110 g



7043

070430001

CE

Auto-darkening LCD mask, for electrode welding, MIG/MAG, TIG and plasma, solar cell power supply

- Viewing area: 92x43 mm
- Darkening shade: DIN 9-13, externally adjustable
- UV/IR protection
- Light to dark time: 1/1000 s
- Dark to light time: 0.1-1.0 s
- Adjustable darkening delay
- Auto on/off
- Grinding feature
- Optimized shape to make it easier to breathe with pulled-down screen



900 g

1144L

011440050

Cable stripping tool with adjustable blade depth, for transverse and longitudinal stripping, with smooth and hook-shaped retractable blade



Ø 4 ÷ 28 mm



70 g

1148P

011480300

Wire stripping pliers, self-adjusting, with cutting device

0,2 ÷ 6,0 mm²

5 - 12 mm

Ø max. 2 mm
CU/AL0,2 - 6,0 mm²


105 g

1600Q 8

016000008

Four-way wrench for control panel operators

Wrench for use for maintenance jobs in countless industries, e.g. electrics, hydraulics, ventilation and gas.

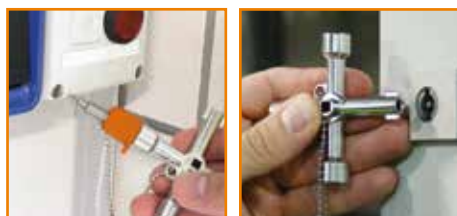

75 g

1600Q 10

016000010

Eight-way wrench, with articulated joint, for control panel operators

- Eight-way wrench, can be rotated to easily select the head to use.
- Magnetic articulated joint for increased force.
- 1/4" male drive for use of sockets.
- Wrench for use for maintenance jobs in countless industries, e.g. electricity, hydraulics, ventilation and gas.



105 g

9738

Cutting oil

- Highly lubricating and protective.
- Suitable for milling, boring, threading, drilling and manual and automatic machine working.
- Highly resistant to oxidation.
- Water washable.
- Solvent-free.



097380040		
097381040		

400 ml

9741

Multipurpose detergent/degreaser

- Detergent and degreaser for dissolving grease, oil, tar, silicone and glue.
- Suitable for cleaning metal, hard plastic, ceramic, steel and aluminium.
- Free from oil residues.




097410040		
097411040		

400 ml

1996MQ/T


 019960005
Insulating cloth

500x500 mm

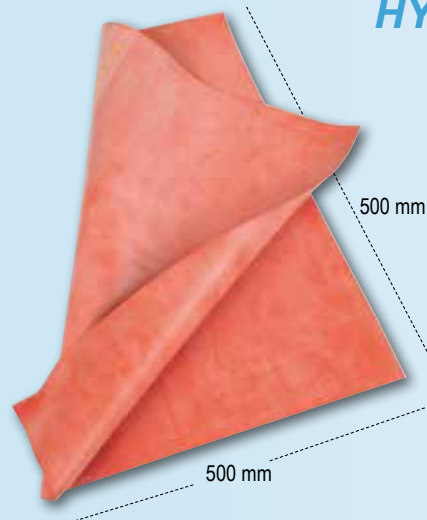**HYBRID**
 370 g

1996MQ/GM

Composite insulating gloves
 EN60903
 EN388
CE**HYBRID**

Gr	L mm			
9	410	019960109		
10	410	019960110		

 442 g

1996SVG

 019960133
Pneumatic tester for insulated gloves

- mandatory testing in accordance with EN90603

**HYBRID**
 500 g

1898/K40

018980004

CE

Manual tank for recirculating cleaning of mechanical parts with heated fluid and bacteria

- Eliminates costs of disposing of solvents or hydrocarbons
- Using Beta's ecological detergent based on enzymes and bacteria allows oil residues to be removed from mechanical parts and disposed of
- Enzymatic function helps to separate oily part from dirty solid part; bacteria transform such part into carbon dioxide and water, thereby keeping regenerating detergent



EFFECTIVE AND ENVIRONMENTALLY FRIENDLY

NO DISPOSAL OF FLUIDS!

EQUIPMENT:

- long bristle brush and connecting pipe
- right-hand and left-hand operation function
- perforated stainless steel grid
- wheels with brakes
- card with display operating temperature and low level alert

ACCESSORIES INCLUDED:

- 2 20-l cans of environmentally friendly liquid detergent and 2 packs of bacteria



TECHNICAL DATA

Max. pump capacity	10 l/min
Tank capacity	40 l
Operating temperature	+5°C ÷ +40°C
Weight	50 kg (when empty)

ATTENTION

Countries where product 1898/K40 is allowed to be distributed: Austria, Belgium, France (from 2021), Hungary, Italy, Netherlands, Poland, Portugal, Spain, United Kingdom.



50 kg



1760DGT/2


017600008



Digital automotive multimeter,
portable, with 2-channel oscilloscope
and waveform generator

KIT CONTENTS:

- multimeter tips
- 2 BNC crocodile clips for oscilloscope
- tip probe for oscilloscope (1X and 10X)
- battery charger
- nylon sheath



**INCLUDES
A 2-CHANNEL
OSCILLOSCOPE!**



TECHNICAL DATA

Display	2.8" colour TFT
Resolution	320 x 240 pixels
Power supply	100V-240V AC, 50Hz-60Hz; DC INPUT 5V DC-2A
Battery	2 x 2600 mAh
Weight	624 g

MULTIMETER SPECIFICATIONS

Test: Voltage, Current, Resistance,
Capacity, Diodes and On-Off
Max. voltage: 600V DC
Max. current: 10A DC
Max. resistance: 40MOHM
Max. capacity: 100uF

OSCILLOSCOPE SPECIFICATIONS

Horizontal

Bandwidth: 40MHz
Sampling frequency range: 250MSa/s (single channel) -
125MSa/s (double channel)
SEC/DIV range: 5ns/div ÷ 500s/div 1,2,5 sequence

Vertical

VOLTS/DIV range: 10mV/div÷10V/divat BNC input
Selectable analogue, bandwidth limit, typical: 20MHz
Low frequency response (-3db): ≤10Hz a BNC
DC Gain Accuracy: ± 3% for Normal or Medium acquisition mode,
10V/div ÷ 10 mV/div

Trigger

Type: Edge
Mode: Auto, Normal, Single
Slope: Rising, Falling, Rising, & Falling
Source: CH1, CH2

Input

Coupling: DC, AC or GND
Supported probe attenuation factors: 1X, 10X, 100X, 1000X

Arbitrary waveform generator

Waveform frequency: Sine (1Hz÷25MHz), Square (1Hz÷10MHz),
Ramp (1Hz÷5MHz), EXP (1Hz÷5MHz)
Width: 2.5Vpp (50Ω) - 5Vpp (high impedance)
Output impedance: 50Ω



624 g

1497KB/S3

014970050

3 tool kit for removing Knorr and Bremse electrical connectors

- 1 tool for bayonet connectors
- 1 single head tool for 2-pole connectors
- 1 double head tool for 4- or 6- and 12-pole connectors




437 g

1497/S3

014970400

Set of 3 cables for electrical signal detection

- 1 straight pc.
- 1 45° pc.
- 1 90° pc.

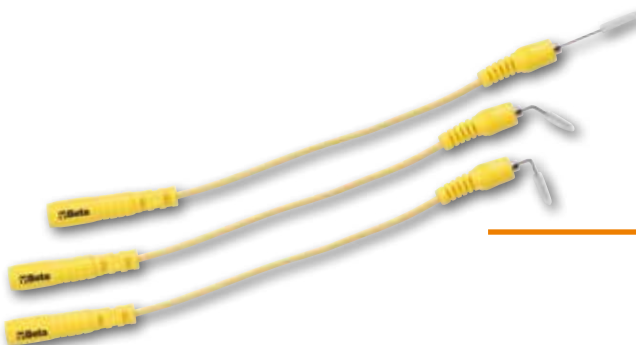

1760DGT 017600005



10 g

1760TMC

017600710

IP54 CE

Infrared thermal camera

Compact thermal camera for contactless temperature measurement, suitable for applications in building, mechanical, electric installation and heating industries.

- **temperature range:** $-20\text{ }^{\circ}\text{C} \div +600\text{ }^{\circ}\text{C}$
- LCD TFT display, 2", 240x320
- sensor, 32x32 pixels
- acquisition frequency 7Hz
- thermal sensitivity $<347\text{mK}$
- automatic acquisition of hot and cold spots
- camera for acquisition of images in BMP format (max. 100 images)
- adjustable emissivity
- power supply: 3 alkaline AAA batteries
- USB interface
- IP54
- infrared band: $6.5\div 14\mu\text{m}$
- visible/infrared image fusion: 0.5; 1; 2m
- alarm function, selecting acceptable maximum and minimum temperatures



TEMPERATURE RANGE:
 $-20\text{ }^{\circ}\text{C} \div +600\text{ }^{\circ}\text{C}$

450 g



1878 2

018780002

Fluid collection tank

- Maximum capacity: 2 l
- Particularly suitable for changing oil in scooters



2 l

l	H mm
2	85

280 g

1878 4

018780004

Fluid collection tank, portable

- Suitable for motorcycles
- Maximum capacity: 4 l
- Reduced splashing



4 l

l	H mm
4	100

500 g

1878 8

018780008

Fluid collection tank

- Height suitable for motorcycles
- Maximum capacity: 8 l



8 l

l	H mm
8	110

500 g

1879/FUEL

018790010

Manual operation fluid extractor, 6 l

550÷710 mm
235 mm
235 mm

**RESISTANT TO HYDROCARBONS**

1,3 kg

960T/C11

009600031



Assortment of sockets for removing/installing sensors

Kit contents:

- 1 double ended hexagon socket, size 1" - 11/16" for oil pressure sensors
- 1 open end hexagon socket, 29 mm, for oxygen sensors
- 1 open end bi-hex socket, 27 mm, for injectors
- 1 open end hexagon socket, 22 mm, for vacuostats
- 1 open end hexagon socket, 22 mm, 80 mm long, for oxygen sensors
- 1 open end hexagon socket, 22 mm, 90 mm long, for oxygen sensors
- 1 open end hexagon socket, 22 mm, compact, 30 mm long, for oxygen sensors
- 1 open end hexagon socket, 22 mm, compact, 50 mm long, for oxygen sensors
- 1 open end hexagon and bi-hex socket, 22 mm, compact, 34 mm long, for oxygen sensors
- 1 open end hexagon socket, 22 mm, tube-shaped
- 1 tap M18x1.5



330x270x25 mm

3,1 kg

1456/C8

014560010

Head gasket alignment kit

Allows quick, precise head gasket alignment

Kit contents:

- 1 pair of guide pins M10x1.5, 60 mm long
- 1 pair of guide pins M10x1.5, 35 mm long
- 1 pair of guide pins M9x1.25, 55 mm long
- 1 handle for removing guide pins
- 1 extension for removing guide pins



300x90x65 mm

650 g

1462CF-SN/C6

014620026



Set of 6 single-ended, articulated hexagon wrenches for fuel injector connectors

Sizes: 12-14-16-17-18-19



275x182x64 mm

1,6 kg



1438DCT

014380300

38"

Tool for removing and installing
6-speed DCTsFor use on Volvo, Ford, Chrysler
and Dodge vehicles

1,2 kg

1474E/VW2

014740150

Ignition coil puller,
for VAG group vehicles

For use on engines 1.0 - 1.2 - 1.4 - 2.0



200 g

1758B-RNT

017580035

Non-return quick coupling
for funnel item 1758B

For Renault 1.5 dCi engine

1758B
017580030

20 g

1484PSA

014840012

Tool for installing water pump stretch belt without belt tightener

For use for PSA and Opel group vehicles engines 1.0 - 1.2



10 g

1485MRC/T

014850315

Tensioning lever for service belts mounted on Mercedes engines

For use with M133 - M270 engines

L 510 mm



L mm	⌀
510	T55


465 g

1485VLV/T

014850320

Tensioning lever for service belts mounted on Volvo engines

L 420 mm

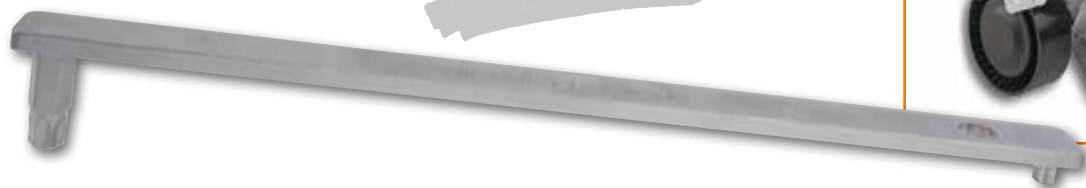

L mm	⌀	○ mm
420	T50-T60	15

460 g



1481K/S4

014810400

Kit of 4 self-locking terminals
for line obstruction

Sizes: 5/16" - 3/8" - 1/2"
and loop



5/16" - 3/8" - 1/2"
and loop



90 g

1482/2

014820002

Adjustable self-locking wrench
for tank floating ring nuts



Ø mm	Ø mm
89÷200	16

1,6 kg

1529/PG

015290010

High-pressure diesel oil pump puller,
for VAG group vehicles

Ø mm
15-24



555 g




1467TU

014670090

Plug for brake fluid tanks

- Can be adapted to 90% of available tanks
- For use with Beta's item 1467LF

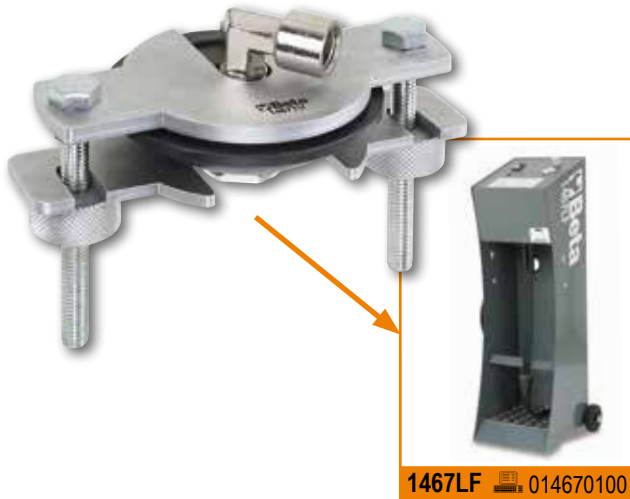

1467LF 014670100

600 g


1470PF

014700200



Tool for replacing cylinders in drum brakes

Jaws remain open, for easy cylinder replacement

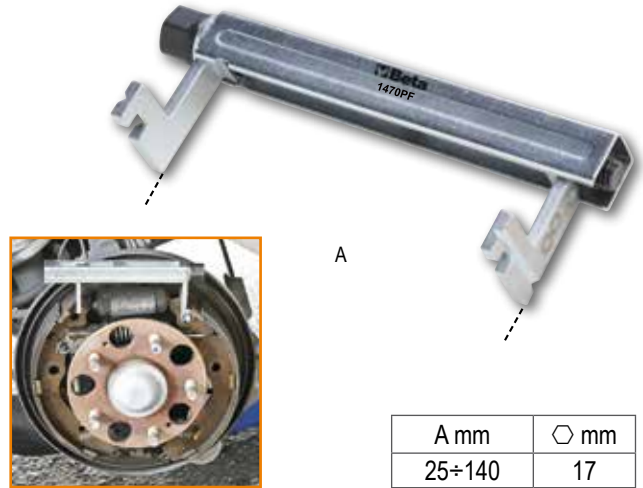

A mm	mm
25÷140	17

250 g

1471GF

014710310

Mouldable hooks for supporting brake calipers while replacing pads, pair



Max 5 kg



50 g

1528

015280000



Self-locking puller for brake discs

A min÷Max mm	mm
170÷380	19



480x240x60 mm

4,8 kg



728L/S3

007280393

Set of 3 impact sockets

© 30-32-36 mm



3/4"



2,2 kg

437K/9

004370029

Tool assortment for repairing male and female threads, wheel fixing screws

Allows original thread to be rectified and dressed

Kit contents:

- Taps: M12x1.25 - M12x1.5 - M12x1.75 - M14x1.5
- Dies: M12x1.25 - M12x1.5 - M14x1.5



mm

12 - 24

161x123x50 mm

550 g

437K/10

004370030

Assortment for repairing damaged threads on oxygen sensors M18x1.5

Kit contents:

- 1 pilot reamer M18
- 1 tap M18x1.5
- 1 tap M20x1.5
- 5 threaded bushes M18x1.5
- 1 bushing tool



mm

13 - 27

190x105x40 mm

800 g

437K/12

004370032

Tool assortment for repairing axle shaft threads

Allows original thread to be rectified and dressed

Kit contents:

- Metric sizes: M16x1.0 - M16x1.5 - M20x1.0 - M20x1.5 - M22x1.5 - M24x1.5 - M24x2.0 - M27x2.0
- Inch sizes: 3/4x16 - 3/4x20 - 13/16x20 - 27/32x20



mm

32 - 35

220x118x52 mm

840 g

3070BE/K

030700250



Electronic hand-spin wheel balancer, portable

Balancing system with hand-spin microprocessor (without motor), for balancing iron or alloy car and motorcycle wheels

- compact and easy to carry, for use in garages, trucks or track pits
- can be mounted to a workbench or a wall
- software includes all unbalance correction programmes, reading of positions with adhesive weights (ALUS), weights hidden behind spokes (SPLIT) and unbalance optimization
- can be used with swivel support BETA 3070BE/S (optional)




COMPACT AND PORTABLE



ACCESSORIES

- flexible graduated ruler
- ring nut with handwheel and 3 cones Ø 45 ÷ 110 mm



H mm	L mm	L1 mm
200	381,5	646



TECHNICAL DATA

Power supply	115-230V AC o 12-24V DC
Max. absorbed power	0.15 kW
Balancing speed	100 rpm
Measurement uncertainty	1 g
Rim width	1.5" ÷ 20" (40÷ 510 mm)
Max. wheel diameter	max 75 kg



14,5 kg



3070BE/F

030700202

Universal motorcycle flange, Ø 40 mm, for item 3070BE/K

For use on wheels with central through-holes, Ø 15 ÷ 35 mm, and on flanged wheels with truing up to Ø 68 mm



4,5 kg

3070BE/S

030700201

Swivel support for portable electronic wheel balancer item 3070BE/K

Allows wheel balancer to be fixed to a wall or a workbench, thereby resulting in reduced installation space



10,8 kg

3070BE/B

030700203

Kit of 8 sockets for truing motorcycle wheels, for item 3070BE/K

For use on following diameters:
28 - 25 - 22 - 20 - 19.05 - 17 - 16 - 15



1,2 kg

1551/C20

015510020

Kit for removing shock absorber heads

Kit contents:

- 7 hexagon sockets, sizes: 16 - 17 - 18 - 19 - 21 - 22 - 24
- 1 socket extension, length: 120 mm
- 3 slotted female bits, sizes: 8x5 - 8x6 - 11x8
- 1 female hexagon bit, size: 10 mm
- 1 male XZN(R) bit, size: M10
- 1 male Torx(R) bit, size: T50
- 4 male hexagon bits, sizes: 5- 6 - 7 - 8
- 1 bit holder extension, length: 95 mm
- 1 bit holder extension, length: 190 mm



12"



5/16"

320x245x71 mm

2,6 kg

1552/C9

015520020

Kit for spreading shock absorber, wishbone and steering wheel joints apart

Working with single or double retractor head also makes it possible to work on double joints, e.g. from VAG group



195x140x40 mm

1 kg

mm

13

1558/C13

015580200

Internal and external snap ring tool, screw-operated

Square drive allows a high force to be applied in both operating conditions

Supplied tips:

- straight: Ø 2.5 - 3 - 3.5 - 3.8 mm
- 45°: Ø 2.5 - 3 - 3.5 - 3.8 mm
- 90°: Ø 2.5 - 3 - 3.5 - 3.8 mm



3/8"

330x220x45 mm

1,8 kg

Ø mm

Ø mm

5,5÷77

5,5÷77



Kit of 4 nylon wheel covers


- preserves and protects wheel from scratches and dust
- during storage, it prevents early deterioration of rubber polymers in summer or winter tyres
- provided with handles for convenient transportation
- fabric: nylon, washable

4x

**IDEAL FOR
WHEEL STORAGE**



An icon allows wheel position (right/left front or right/left rear) identification

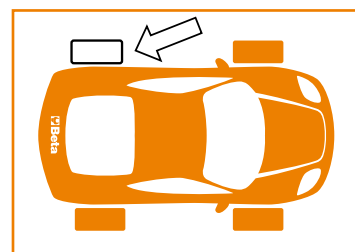

973 14-18

009730014

Suitable for the following rims:
14" ÷ 18" item number 009730014
19" ÷ 22" item number 009730019

973 19-22

009730019

1367/K10


013670200

Kit of punches for installing parking sensors

Kit contents:

- sizes: 17 - 18 - 18.2 - 19 - 20 - 22.5 - 24 - 26 - 26.7 - 32 mm

**PERPENDICULAR,
BURR-FREE
HOLES**

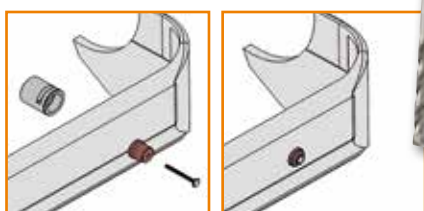

mm

12

190x130x58 mm

645 g

1360G

013600000

**Soft dead-blow rubber hammer,
for installing gaskets and delicate parts**

The extremely soft faces prevent any parts being worked on from getting damaged, as they absorb impact by getting deformed.

L mm	Ø mm
280	72



670 g

1479LB/C5

014790150

Kit of 5 metal trim pin removers



215x165x50 mm

770 g

1479LV/S3

014790100

**Kit of 3 multipurpose wrecking bars,
made of metal**

"Sizes:

1479LV/1: 10x12 mm

1479LV/2: 4.8x9.6 mm

1479LV/3: 2.8x6 mm



114 g

1479ML/B17

014790700

**Kit of 17 multipurpose wrecking bars,
made of plastic**



**PARTICULARLY
RECOMMENDED FOR
PRECISION JOBS**

130x205x30 mm

250 g



3003PRO

030030150

**DURABLE AND
ERGONOMIC**

Creeper made of shockproof plastic

Complete with:


- ergonomic head cushion
- soft back protector
- 2 178 mm double bearing castors for trouble-free use on uneven surfaces and pipes/cables
- 1 castor
- double height adjustment from the ground: 38 or 76 mm
- 2 portable LED lamps (250 lumens) with fixing magnets
- load capacity: 200 kg
- weight: 7.7 kg



**DOUBLE LED LAMP
WITH MAGNET**



H min mm	H Max mm	L mm	L1 mm
170	230	1040	570

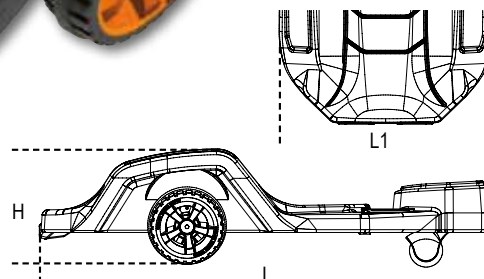

7,7 kg



3003PRO/SP

030030151

Wall-mounted plastic support for creeper 3003PRO

Can be mounted to walls, bridge jacks, chests of drawers or other equipment, thereby allowing creeper to be fixed through a quick system with safety closure.



3003PRO/PM

030030152

Magnetic tool holder, round, for creeper item 3003PRO

Can be applied to wheel rims of creeper to retain small items during jobs



3003C

030030100

Creeper made of shockproof plastic

Complete with:

- head and lumbar region with carbon look finish
- upper metal plates for fixing magnetic accessories
- 6 rubber castors, 79 mm in diameter
- Max. capacity: 120 kg



5,5 kg

2254SM

022540033

Creeper mat, made of EVA

Double finish:

- 1 side in soft EVA
- 1 side in hard carbon look for improved slip performance



670 g

3026/SA

030260510

Wheel hub support for pit jacks

- For use for maintenance jobs relating to hubs, and during shock absorber replacement jobs
- Can be adapted to hydraulic pit jacks items 3026 0,3 and 3026 0,5



3026 0,3 - 3026 0,5



950 g

3026/SAM

030260515

Shock absorber support for pit jacks

- For use for supporting shock absorber when suspension arm is removed
- Shock absorber bracket, max. diameter 80 mm, plus adapter for max. diameters 60 mm
- Can be adapted to hydraulic pit jacks items 3026 0.3 and 3026 0.5



2,5 kg

8181 6/S4

081810906

4x

Kit of 4 lashing systems,
LC 1000 kg, with waterproof
polyester backpack

Single hooks
Belt width: 35mm
Overall length: 6 m



EN 12195-2

L m	L1 mm	L2 mm
6	400	5600

 4 kg

8182 8,5/S2

081821985

2x

Kit of 2 lashing systems,
LC 2000 kg, with waterproof
polyester backpack

Single hooks
Belt width: 50mm
Overall length: 8.5 m



EN 12195-2

L m	L1 mm	L2 mm
8,5	400	8100

 5,5 kg

8190 10

081900010


Ratchet load binder with 2 hooks
Grade 8

TECHNICAL DATA

- Safety factor: 2
- Heat treatment: hardening and tempering
- Traceability code

AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN10204 type 2.2
- Inspection certificate UNI EN10204 type 3.1

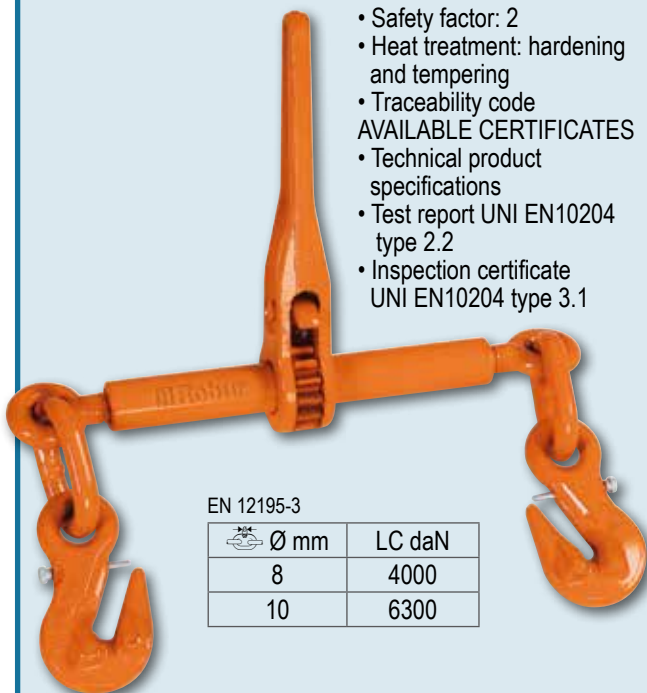

EN 12195-3

Ø mm	LC daN
8	4000
10	6300

 5,5 kg

8190B 8X3,5

081901308

Ø mm	LC daN	L m	kg
8	4000	3,5	6

8190B 10X3,5

081901310

Ø mm	LC daN	L m	kg
10	6300	3,5	9,8

Chain slings
Grade 8

TECHNICAL DATA

- Safety factor: 2
- Heat treatment: hardening tempering
- Chain-sling identification tag

ATTACHED CERTIFICATES

- Manufacturer's Certificate

AVAILABLE CERTIFICATES

- Technical product specifications
- Test report UNI EN 10204 type 2.2



7362B

Occupational shoe, made of mesh fabric, highly breathable, with TPU inserts

Heel stability support, stretch slip-on collar and EVA sole with durable nitrile rubber tread

- Without toe cap
- Without penetration-proof insole



0-GRAVITY



EU	UK	
39	6	073620039
40	6,5	073620040
41	7	073620041
42	8	073620042
43	9	073620043
44	10	073620044
45	10,5	073620045
46	11	073620046
47	12	073620047
48	13	073620048

EN 20347
2012

01 FO HRO SRC

7363N

Occupational shoe, made of mesh fabric, water-repellent, with TPU inserts

Heel stability support, stretch slip-on collar and EVA sole with durable nitrile rubber tread

- Without toe cap
- Without penetration-proof insole



0-GRAVITY



EU	UK	
39	6	073630039
40	6,5	073630040
41	7	073630041
42	8	073630042
43	9	073630043
44	10	073630044
45	10,5	073630045
46	11	073630046
47	12	073630047
48	13	073630048

EN 20347
2012

02 FO HRO SRC

REMARKABLY LIGHTWEIGHT:
approximate weight
for size 42: 330 GRAMS

7431P

Two pairs of sneaker socks with breathable texture inserts

One pair in black/orange colour and one pair in black/grey colour

- Lightweight and breathable
- Anatomically shaped cuffs
- Nylon and cotton reinforcements on sole and heel areas
- Nylon sole woven with natural bamboo fibre



M 39-42	074310102
L 43-46	074310104

Bamboo fiber



breathable

resistant

anti bacterial



7528 Jeans

Stretch work jeans trousers
98% denim cotton, 2% stretch fabric,
10 ounces

- Stone-washed
- Two large front pockets
- Two rear pockets
- Large left pocket with strap closure and small tool pocket
- Ruler pocket and hammer loop



SLIM FIT



XS	075280046
S	075280048
M	075280050
L	075280052
XL	075280054
XXL	075280056
XXXL	075280058

7529 Jeans

Stretch work bermuda jeans shorts
98% denim cotton, 2% stretch fabric,
10 ounces

- Stone-washed
- Two large front pockets
- Two rear pockets
- Large left pocket with strap closure and small tool pocket
- Ruler pocket and hammer loop



SLIM FIT



XS	075290046
S	075290048
M	075290050
L	075290052
XL	075290054
XXL	075290056
XXXL	075290058

7575N

Sleeveless softshell jacket
90% nylon, 10% stretch fabric,
250 g/m², black

- Front zip closure
- Two waist pockets with zip closure
- Exterior chest pocket with vertical zip closure



S	075750301
M	075750302
L	075750303
XL	075750304
XXL	075750305
XXXL	075750306

7547BL

Three-button polo shirt,
100% cotton, 200 g/m²,
blue

XS	075470200
S	075470201
M	075470202
L	075470203
XL	075470204
XXL	075470205
XXXL	075470206



7547G

Three-button polo shirt,
100% cotton, 200 g/m²,
grey

XS	075470300
S	075470301
M	075470302
L	075470303
XL	075470304
XXL	075470305
XXXL	075470306



7547N

Three-button polo shirt,
100% cotton, 200 g/m²,
black

XS	075470400
S	075470401
M	075470402
L	075470403
XL	075470404
XXL	075470405
XXXL	075470406





7549BL

Work t-shirt, 100% cotton,
150 g/m², blue

XS	075490200
S	075490201
M	075490202
L	075490203
XL	075490204
XXL	075490205
XXXL	075490206



7549G

Work t-shirt, 100% cotton,
150 g/m², grey

XS	075490300
S	075490301
M	075490302
L	075490303
XL	075490304
XXL	075490305
XXXL	075490306



7549N

Work t-shirt, 100% cotton,
150 g/m², black

XS	075490400
S	075490401
M	075490402
L	075490403
XL	075490404
XXL	075490405
XXXL	075490406



9565T

095650200

**Sheet steel table drum
with varnished multi-ply birch top**

Supplied with a double KIT
of spacing tubes (7 cm or 20 cm)
for vertical adjustment.

**ADJUSTABLE IN
HEIGHT TUBES
7 or 20 cm**

h 95 → 108 cm - Ø 70 cm



18,2 kg

9565S

095650300

**Sheet steel drum
with seat made of removable
imitation leather**



h 60 cm - Ø 38 cm

6 kg

9565K

095650500

**Drum table 9565T
with two seats 9565S**



30,2 kg



9565BBQ

095650100


Sheet steel barbecue drum with grill, brazier and lid complete with locking clamp

- Chromium-plated steel grill (compliant with Italian Ministerial Decree of 21/03/73 and Regulation (EC) 1935/2004 on food contact materials), with handles and feet.



h 88 cm - Ø 59 cm



22 kg

9565ICE

095650400

Sheet steel ice drum



- With lid and non-scratch container, certified for food use
- Interior of drum is coated with antirust, water-resistant paint.
- Storage container can accommodate ice and bottles/cans to cool.

h 60 cm - Ø 38 cm

6 kg



998015672



Beta Utensili S.p.A.
Via Volta 18
20845 Sovico (MB)
Tel. 039.2077.1
Fax 039.2010742
www.beta-tools.com

Promotion valid from 31/08/2020 to 14/12/2020

The images are for reference only. Beta Utensili S.p.A. reserves the right to update and upgrade its product range without notice.